



Products

Font Size :

Human-Machine Interfaces(HMIs)-GOT
▶ Product List
▼ Product Features
GOT2000 Series
▶ GOT SIMPLE Series
▶ GT SoftGOT
▶ FA Application Package iQ Monozukuri
▶ Software Features
▶ Product Selection

GOT2000 Series

Feature Lineup GOT Solutions Drive Control Interactive Solutions Function List Applicable Devices

Concept Movie

GOT2000 GT27 model GT25 model GT25 rugged model GT25 open frame model GT23 model GT21 model
Wide model Handy GOT

GT2104	GT2103
--------	------------------------

Small screen, big possibilities



Small, compact, easy to operate!

Ethernet built into a compact body!

The intuitively understandable 5-color backlight offers choices of backlight color and backlight blink according to machine operation state.

Item	Specifications
Display	3.8", monochrome (black/white), 32 shade grayscale TFT LCD display
Resolution	320 × 128 dots
Backlight	5-color LED (white, green, pink, orange, red)
User memory	Memory for storage (ROM): 3 MB
Standard interface	Ethernet, RS-422/485 USB device (USB Mini-B): 1 channel (USB 1.1 (Full-Speed 12 Mbps))
Extension interface	For installing an SD memory card unit

High-definition LCD

GT2103 is equipped with an easy to see, compact high-resolution TFT LCD with 32 gray scales.



SD memory card unit is available!


SD memory cards can be used when the optional SD memory card unit is attached.



SD memory card unit
GT21-03SDCD
Separate SD memory card is required.

page top

GT2103-PMBD external appearance [rear face]

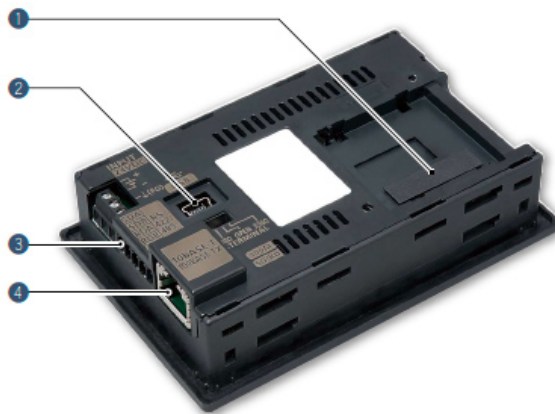

- 1 SD memory card unit interface**
Connect an optional SD memory card unit and save data including alarms and logging data.
* Excluding GT2103-PMBLS
- 2 USB interface: device (USB Mini-B)**
Connect to a personal computer and transfer data.
- 3 RS-422/485 interface**
Connect to various industrial devices and barcode readers.
* Excluding GT2103-PMBDS2
* RS-422 on GT2103-PMBLS (dedicated to FX connection)
- 4 Ethernet interface**
Use Ethernet to simultaneously connect up to two types of industrial devices from different manufacturers. CC-Link IE Field Network Basic compatible devices can also be connected.
* GT2103-PMBD only

page top

GT21 model product map

GT2104
4.3 inch



GT2103
3.8 inch



See details of GT21 model product map

[GOT2000](#)
 [GT27 model](#)
 [GT25 model](#)
 [GT25 rugged model](#)
 [GT25 open frame model](#)
 [GT23 model](#)
 [GT21 model](#)
[Wide model](#)
 [Handy GOT](#)

[Feature](#)
 [Lineup](#)
 [GOT Solutions](#)
 [Drive Control Interactive Solutions](#)
 [Function List](#)
 [Applicable Devices](#)
[Concept Movie](#)

[page top](#)

FA Products

▶ **Edge Computing Products**

- ▶ Industrial Computer MELIPC
- ▶ Edge Computing Software

▶ **Controllers**

- ▶ Programmable Controllers MELSEC
- ▶ Simple Application Controllers
- ▶ Motion Controllers
- ▶ Computerized Numerical Controllers(CNCs)
- ▶ Data logging analyzer-MELQIC

▶ **FA Sensor**

- ▶ FA Sensor MELSENSOR

▶ **Drive Products**

- ▶ AC Servos-MELSERVO
- ▶ Inverters-FREQROL
- ▶ Geared Motors

▶ **Visualization**

- ▶ Human-Machine Interfaces(HMIs)-GOT
- ▶ SCADA MC Works64

▶ **Robots**

- ▶ Industrial/Collaborative Robots-MELFA

▶ **Low-voltage Power Distribution Products**

- ▶ Low-voltage Circuit Breakers
- ▶ Contactors and Motor Starters

▶ **Power Monitoring Products**

- ▶ Power Management Meters
- ▶ Energy Saving Supporting Devices

▶ **Medium-voltage Power Distribution Products**

- ▶ Protection Relays

▶ **Processing Machines**

- ▶ Laser Processing Machines
- ▶ Electrical Discharge Machines
- ▶ Electron Beam Machines

▶ **Sewing Machines**

- ▶ Sewing Machines